


HARDWARE



5/16" x 1" Machine Bolt



5/16" Washer





5/16" Kep Nut





1/24/2020

TOOLS REQUIRED











PRODUCT SPECIFICATIONS

B10WBRCS INGROUND BENCH WITH BACK

Seats & Back: Angle frame made with 2" x 2" x 1/8" structural steel angle. 3/4" #9 steel expanded metal. 10 gauge x 1-1/2" flat bar center support and mounting bracket understructure. Electrically MIG welded.

Coating: Oven fused functionalized polyethylene copolymer-based thermoplastic. Fluidized bed coating application with superior mechanical performance, impact resistance and UV-stability.

Frame: 2-3/8" O.D. x 12 gauge pre-galvanized structural steel tubing. Seat/back support is bent over a mandrel through the bend radius producing a wrinkle free bend. Tube ends are pre-galvanized steel capped. Seat mounting points are 7 gauge x 1-1/2" die stamped steel flat bar. All electrically MIG welded.

Frame Coating: Electrostatic powder coated application oven cured.


Hardware: All stainless steel hardware fasteners.

Dimensions: 10' bench inground with back. Seats and back 10" wide x 120-1/4" long. Seat height is 18" from ground, seat back height is 33-7/8" from ground. Overall height is 49-13/16". Total depth of seat with back is 21-1/2".



COMPONENTS

Attach the 10' Expanded Seat and Back to the legs using specified hardware.

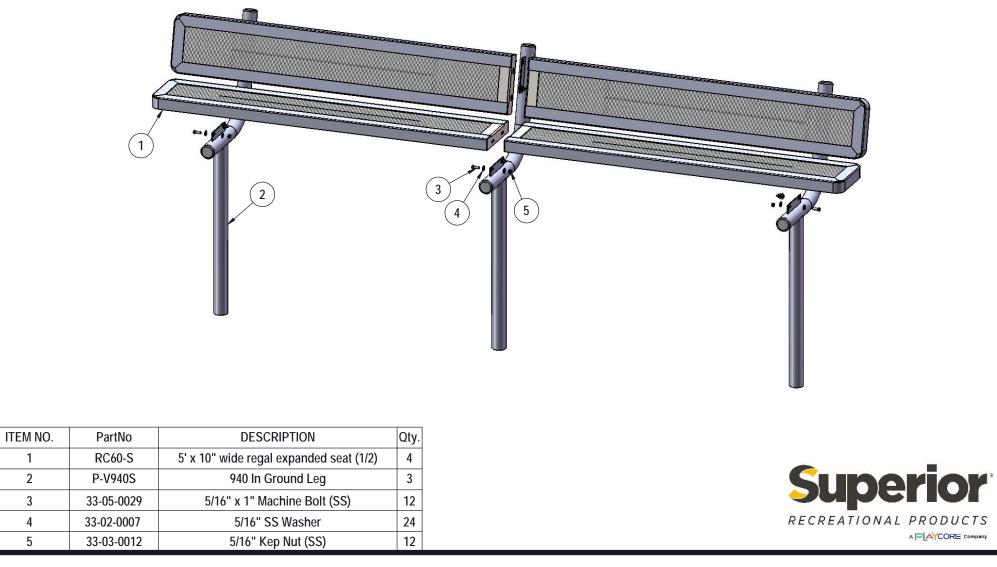

1


2

3

4

5

FOOTINGS

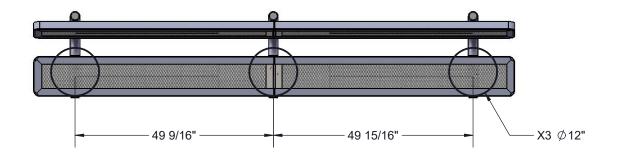

Estimated Required Concrete: 7 - 50lb Bags of Concrete Mix

