

1/8/2020 Page 1 of 8

## **HARDWARE**



5/16" x 1" Machine Bolt



5/16" Washer



5/16" Washer



1/8/2020 Page 2 of 8

## PRODUCT SPECIFICATIONS

## B8WBRCD4-4S DOUBLE SIDED INGROUND BENCH WITH BACK

Seat & Back: 2" x 2" x 1/8" formed angle frame with 1-1/2" radius corners. 3/4" #9 steel expanded metal. 7 gauge x 1-1/2" flat bar center support and mounting bracket understructure. Electrically MIG welded.

Coating: Oven fused functionalized polyethylene copolymer-based thermoplastic. Fluidized bed coating application with superior mechanical performance, impact resistance and UV-stability.

Frame: The main post is fabricated from 4 x 4 x 11 gauge square tubing. 2-3/8" O.D. x 12 gauge pre-galvanized structural steel tubing seat support. Seat arms are supported by a 1/4" thick, 6" gusset. Tube ends are pre-galvanized steel capped. Seat and back mounting points are 7 gauge x 1-1/2" die stamped steel flat bar. All electrically MIG welded.


Frame Coating: Electrostatic powder coated application oven cured.

Hardware: All stainless steel hardware fasteners.


Dimensions: 8' bench inground with back. Seat and back are 10" wide x 96" long. Seat height is 18". Seat back height is 34-1/16". Total depth of seat with back is 44".




1/8/2020 Page 3 of 8

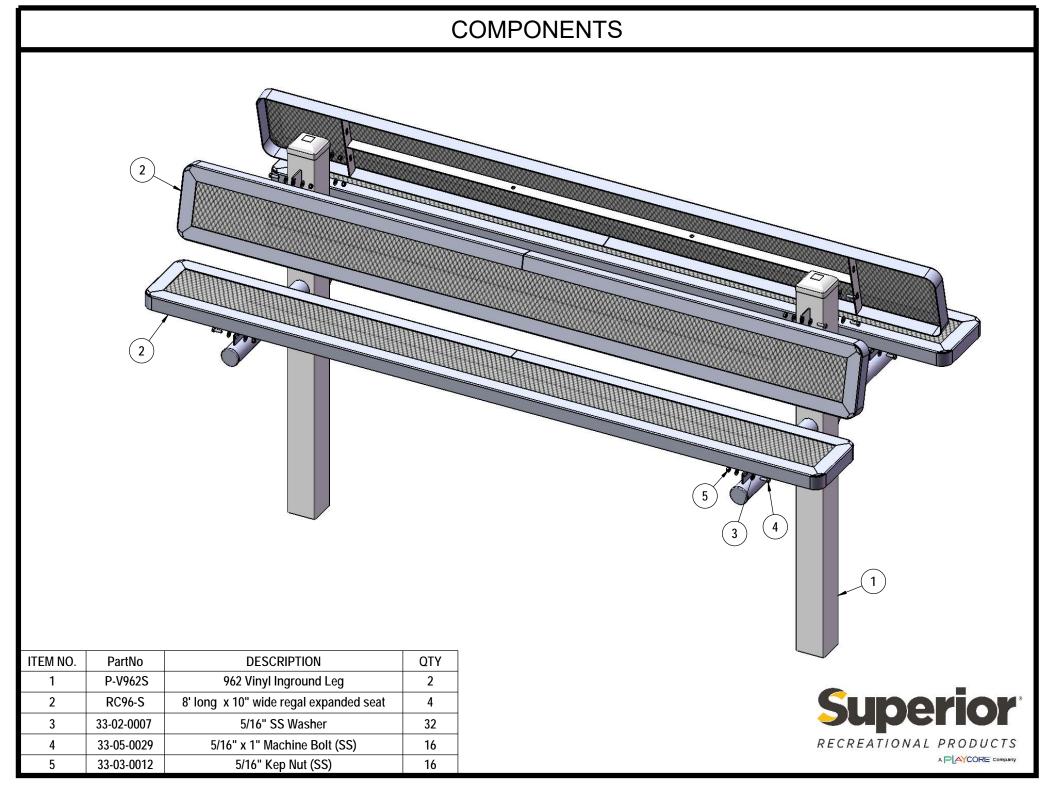


1/8/2020 Page 4 of 8

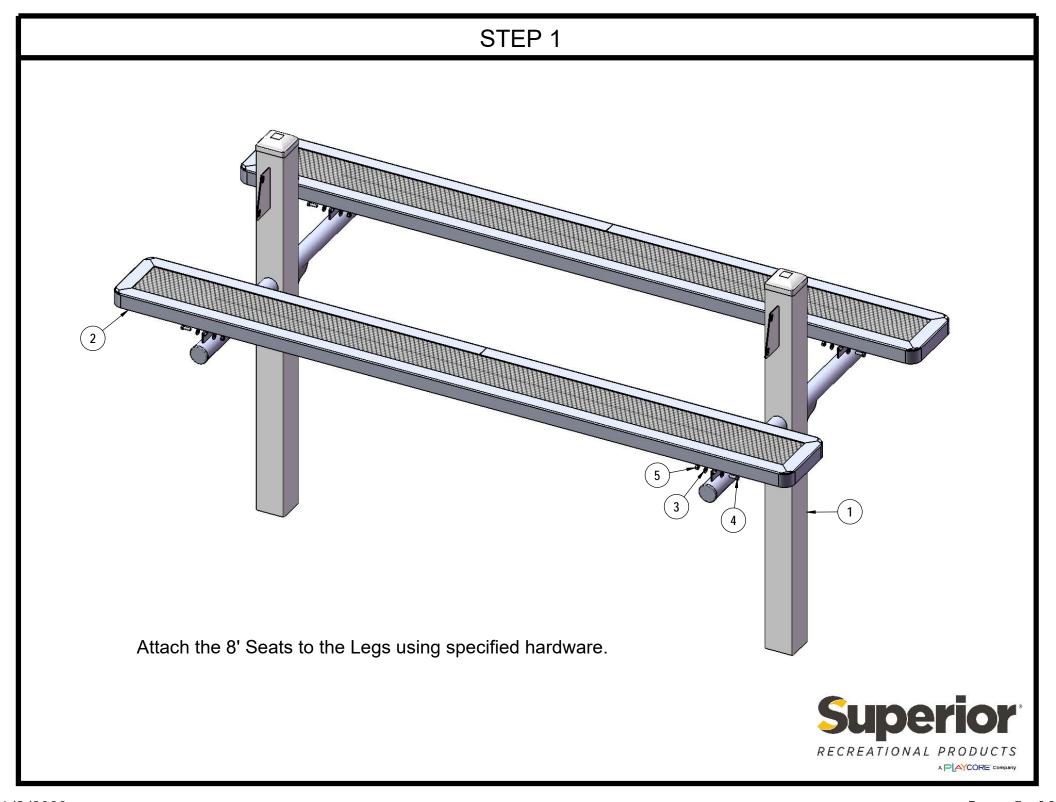


1/8/2020 Page 5 of 8

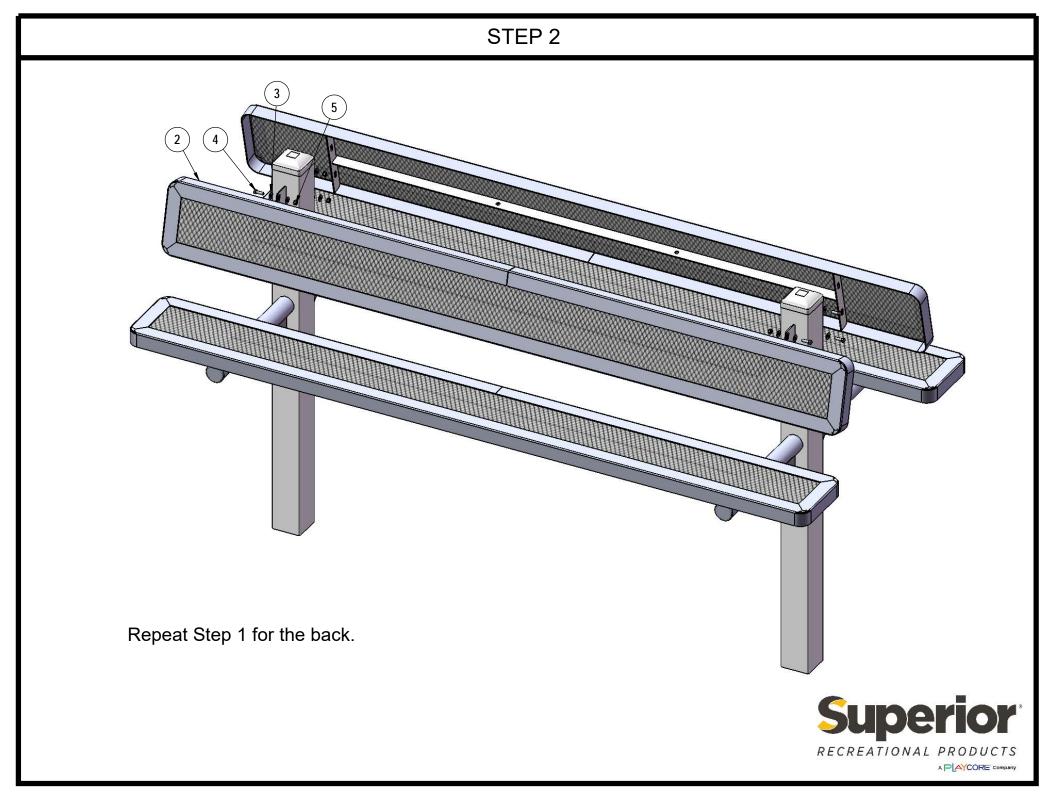

1/8/2020 Page 6 of 8

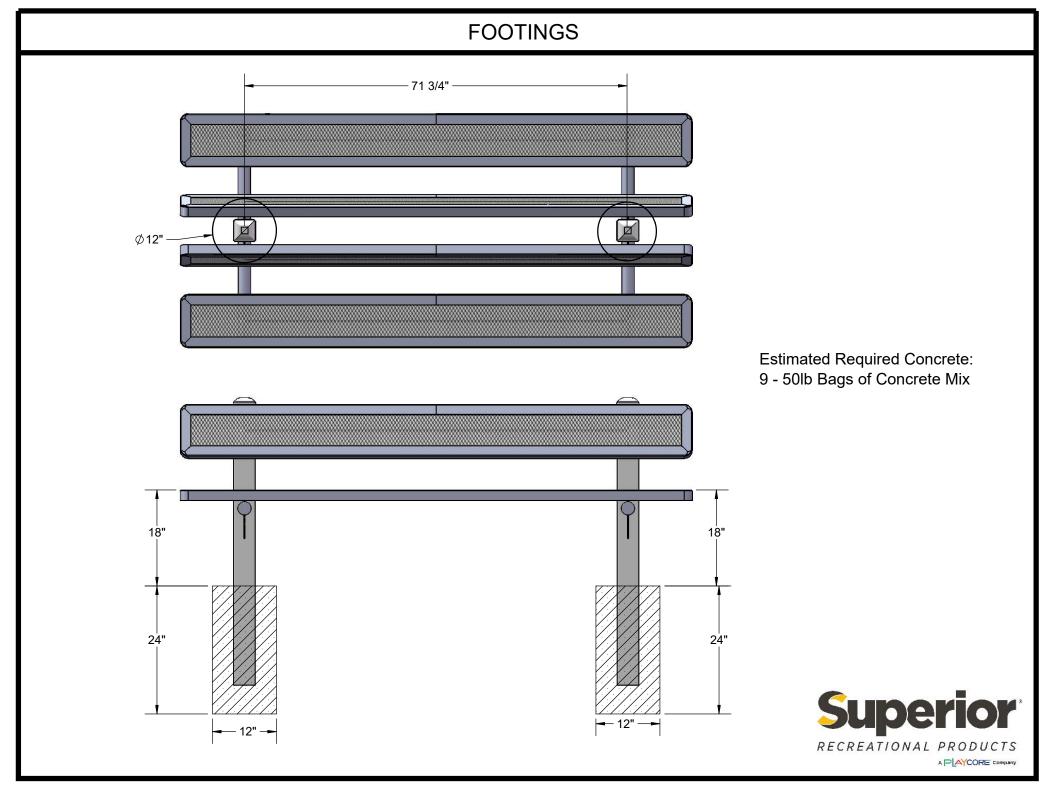

1/8/2020 Page 7 of 8

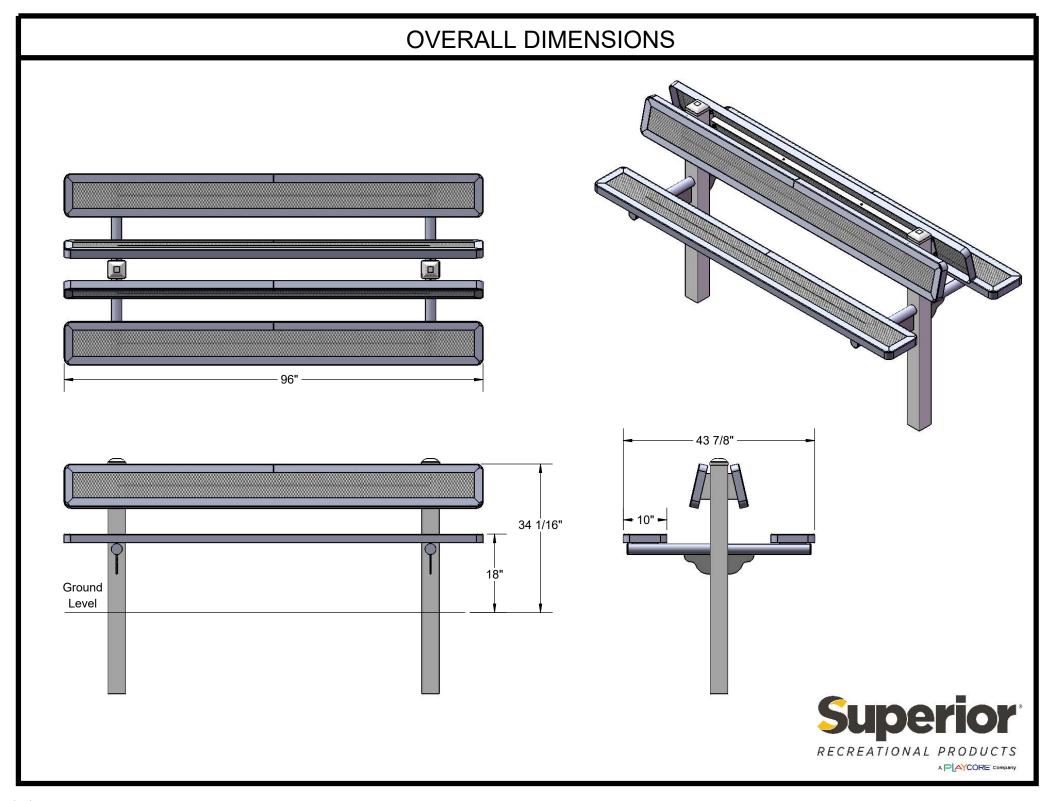

1/8/2020 Page 8 of 8