


Site Amenities

BY SUPERIOR RECREATIONAL PRODUCTS

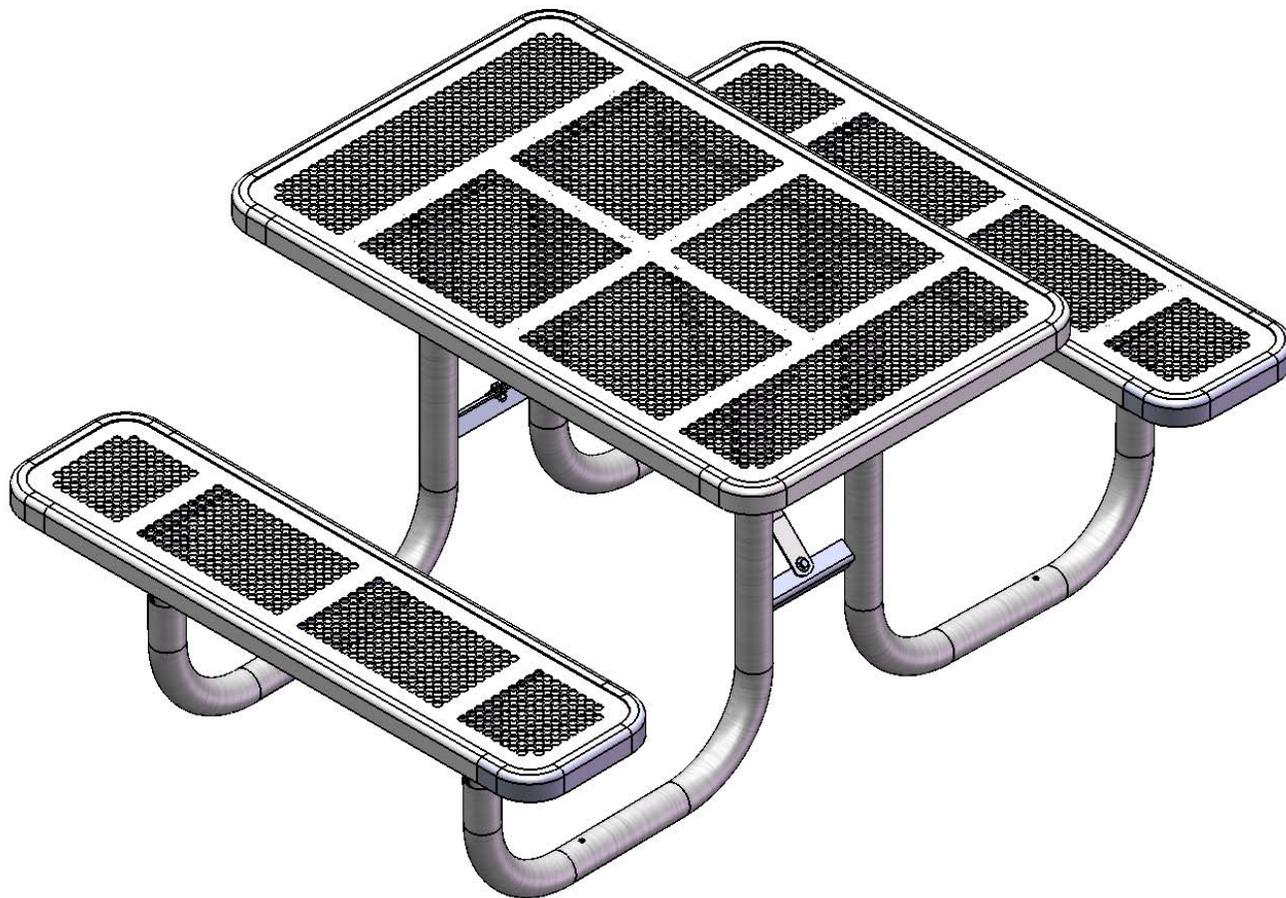


Model #
T4INNV

 **SUPERIOR**[®]
RECREATIONAL PRODUCTS
A **PLAYCORE** Company


HARDWARE



5/16" x 1"
Machine Bolt



5/16" Washer



5/16" Keeplow Nut

PRODUCT SPECIFICATIONS

T4INNV 4' PORTABLE PICNIC TABLE WALK-THROUGH DESIGN

Top & Seats: 11 gauge die formed angle frame 1"x1-7/8" with 3" radius corners. Seat and top plates are fabricated from a 12ga plate. Holes are precision punched at 5/8" diameter. 7 gauge x 1-1/2" flat bar center support and mounting bracket understructure. Electrically MIG welded.

Coating: Oven fused functionalized polyethylene copolymer-based thermoplastic. Fluidized bed coating application with superior mechanical performance, impact resistance and UV-stability.


Frame: 2-3/8" O.D. x 12 gauge pre-galvanized structural steel tubing. Cross braces 1" O.D. x 16 gauge pre-galvanized structural steel tubing. Brace attachment points are 1-1/2"x1-1/2"x3/16" steel angle. Seat and top mounting are points 7 gauge x 1-1/2" die stamped steel flat bar. Legs are bent over a mandrel through the bend radius producing a wrinkle free bend. Holes are predrilled in legs for optional surface mounting. All electrically MIG welded.

Frame Coating: Electrostatic powder coated application oven cured.

Hardware: All stainless steel hardware fasteners.


Dimensions: 4' portable picnic table walk-through design. Top is 30" wide x 48" long and is 30-1/4" high. Seats are 12" wide x 48" long and 18-1/4" high. Outside to outside dimension is 69" x 48".

COMPONENTS

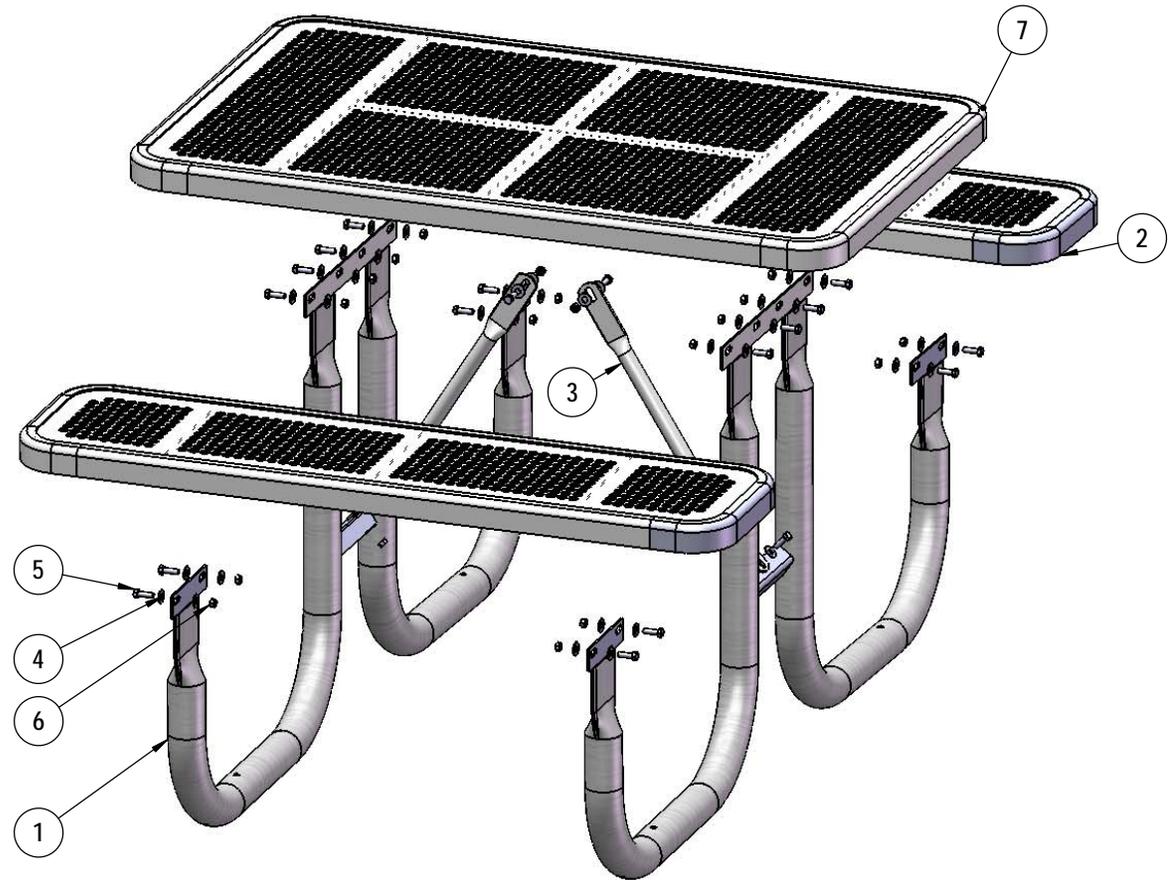


ITEM NO.	PartNo	DESCRIPTION	QTY
1	P-V238	238 Vinyl Frame	2
2	T-P48-S	4' Punched Seat	2
3	P-01-04-0243	21 3/8" Brace	2
4	33-02-0007	5/16" SS Washer	40
5	33-05-0029	5/16" x 1" Machine Bolt (SS)	20
6	33-03-0009	5/16" Hex Nut (SS)	20
7	T-P48-T	4' Punched Top	1

STEP 1

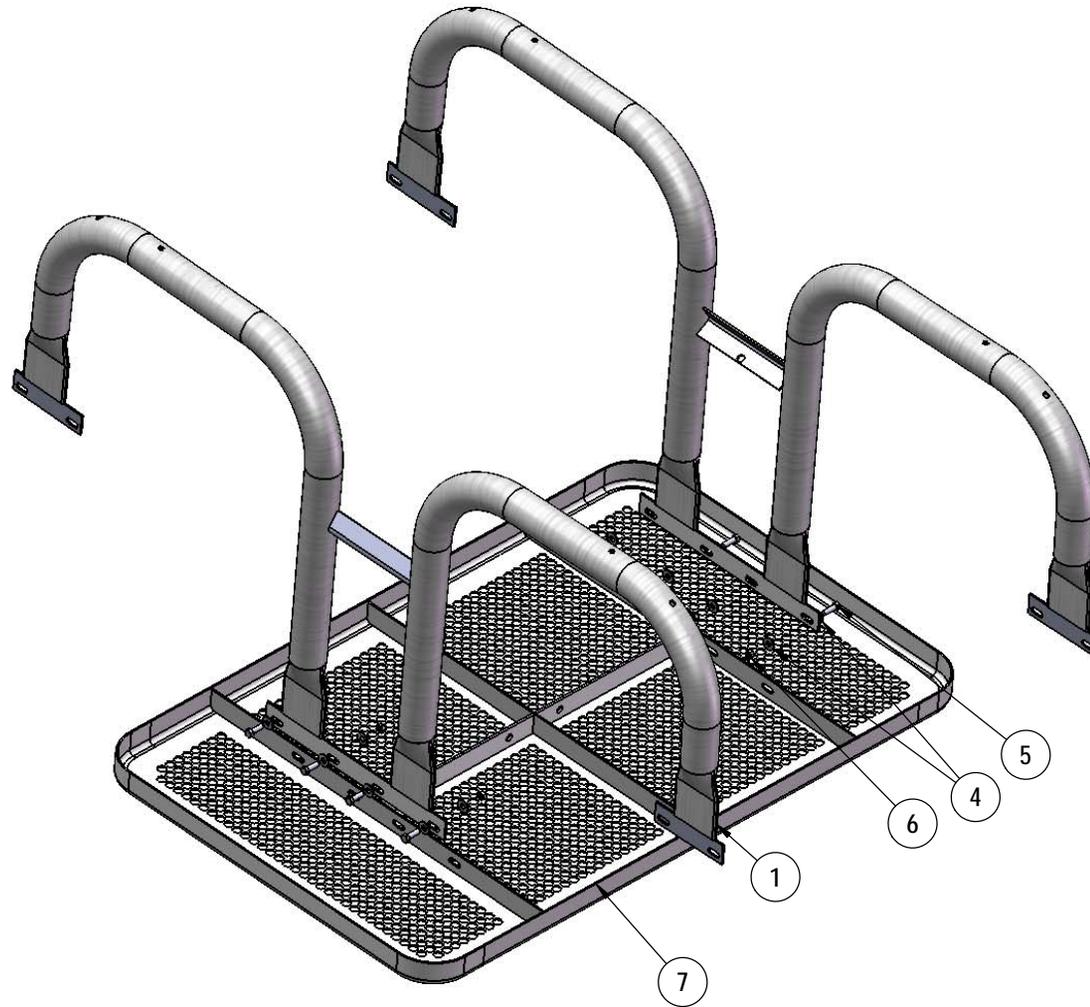


Attach the Frames to the 4' Punched Top using the specified hardware.

STEP 2

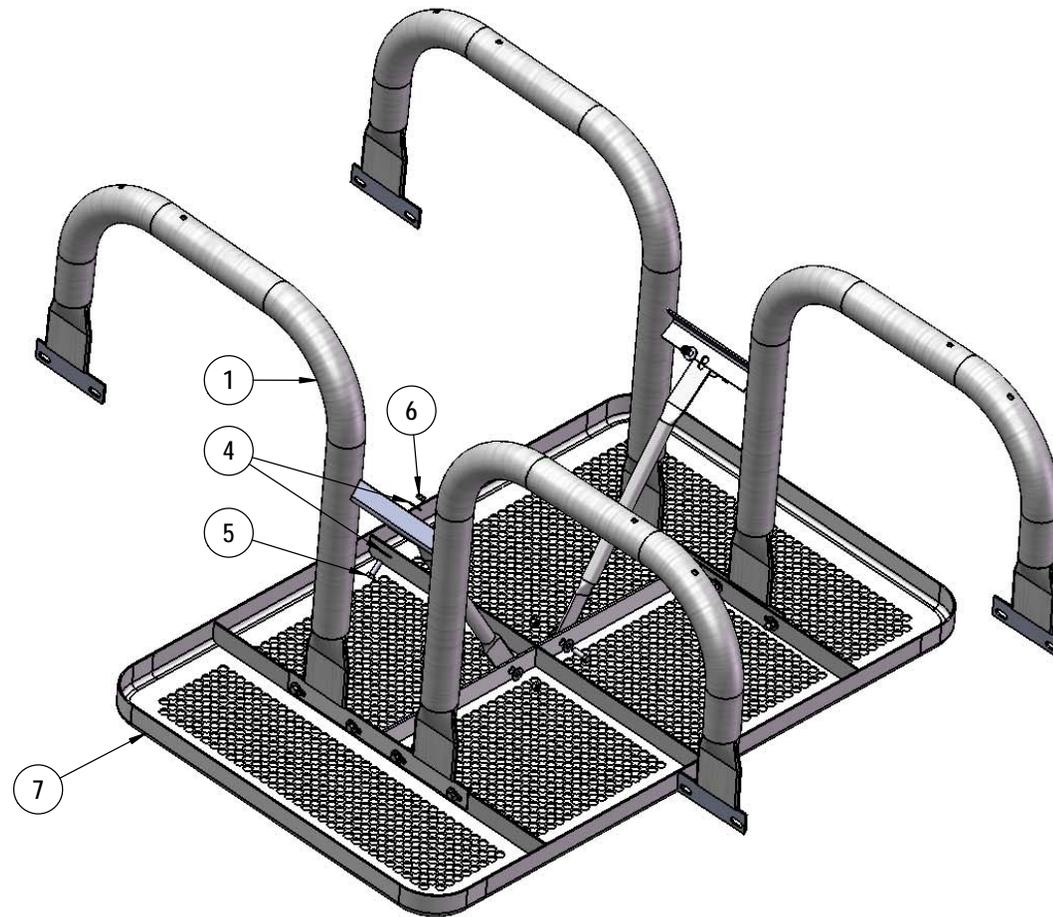

Attach the 21-3/8" Braces to the 4' Punched Top and the Frames as shown using specified hardware.

STEP 3

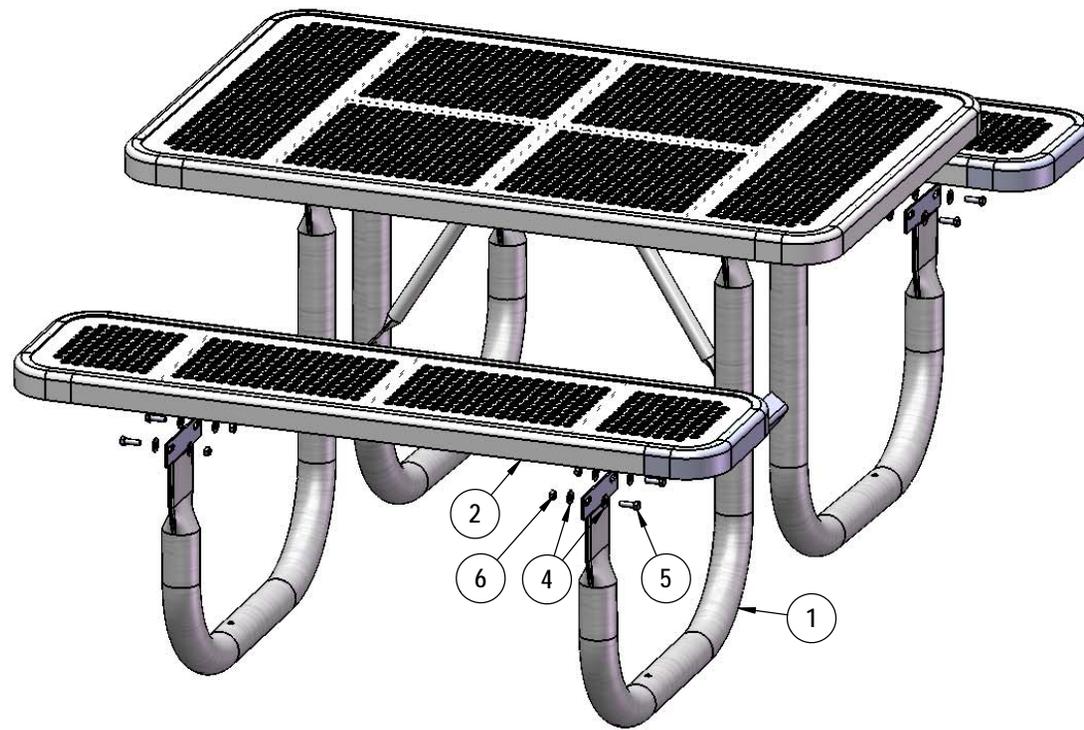

Attach the 4' Punched Seats to the Frames using specified hardware.

OVERALL DIMENSIONS

