



Model # B10WBRCP



1/24/2020

# HARDWARE

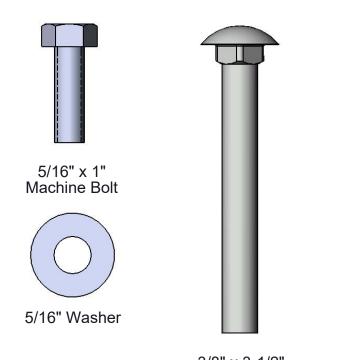



3/8" Washer



3/8" Kep Nut




5/16" Kep Nut


3/8" x 3-1/2" Carriage Bolt







## **TOOLS REQUIRED**











1/24/2020

### **PRODUCT SPECIFICATIONS**

#### B10WBRCP PORTABLE BENCH WITH BACK

Seats & Back: Angle frame made with 2" x 2" x 1/8" structural steel angle. 3/4" #9 steel expanded metal. 10 gauge x 1-1/2" flat bar center support and mounting bracket understructure. Electrically MIG welded.

Coating: Oven fused functionalized polyethylene copolymer-based thermoplastic. Fluidized bed coating application with superior mechanical performance, impact resistance and UV-stability.

Frame: 2-3/8" O.D. x 12 gauge pre-galvanized structural steel tubing. Seat/back support is bent over a mandrel through the bend radius producing a wrinkle free bend. Tube ends are pre-galvanized steel capped. Seat mounting points are 7 gauge x 1-1/2" die stamped steel flat bar. Cross braces are 1" O.D. x 16 gauge pre-galvanized structural steel tubing. All electrically MIG welded.


Frame Coating: Electrostatic powder coated application oven cured.

Hardware: All stainless steel hardware fasteners.


Dimensions: 10' bench portable with back. Seats and back are 10" wide x 120-1/4" long. Seat height is 18-3/8", seat back height is 34-1/4". Total depth of seat with back is 22-3/8".




# COMPONENTS

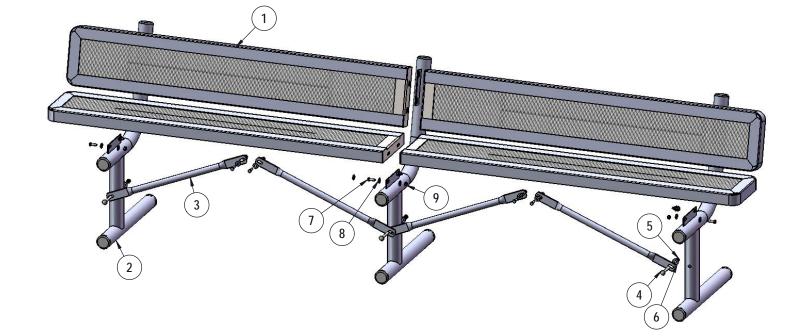


ITEM NO.	PartNo	DESCRIPTION	Qty.
1	RC60-S	5' x 10" wide regal expanded seat (1/2)	4
2	P-V940P	940P Vinyl Leg	3
3	P-01-04-0129	26 3/4" Brace	4
4	33-06-0058	3/8" x 3" Carriage Bolt (SS)	3
5	33-03-0013	3/8" Kep Nut (SS)	3
6	33-02-0008	3/8" Flat Washer (SS)	3
7	33-05-0029	5/16" x 1" Machine Bolt (SS)	16
8	33-02-0007	5/16" SS Washer	33
9	33-03-0012	5/16" Kep Nut (SS)	16

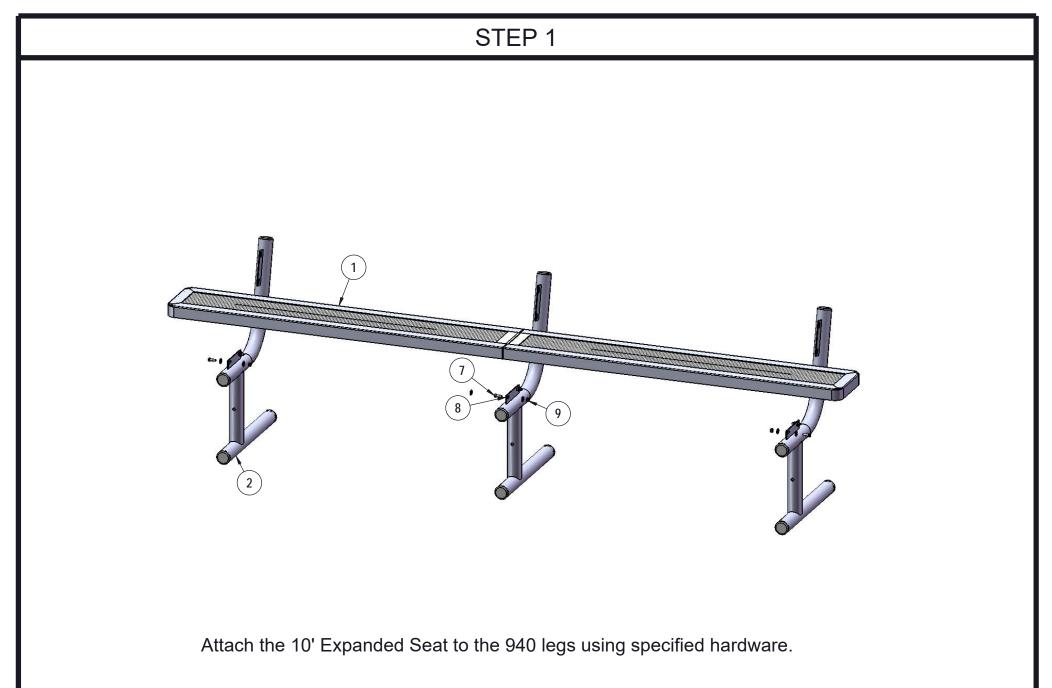



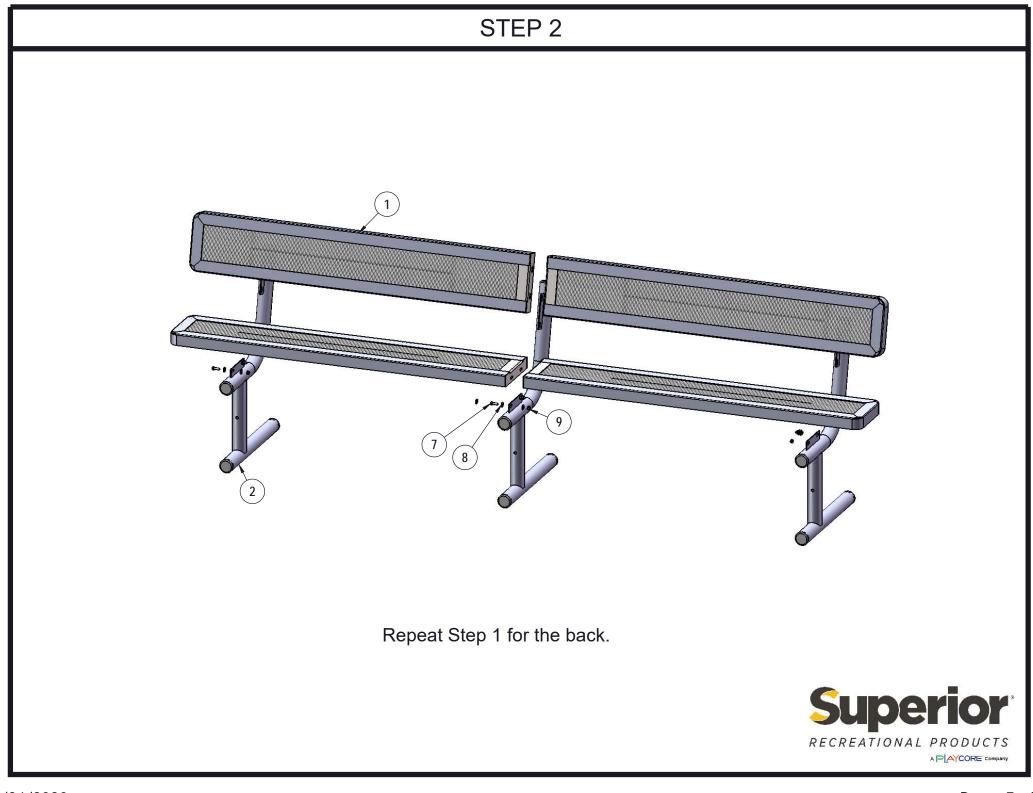

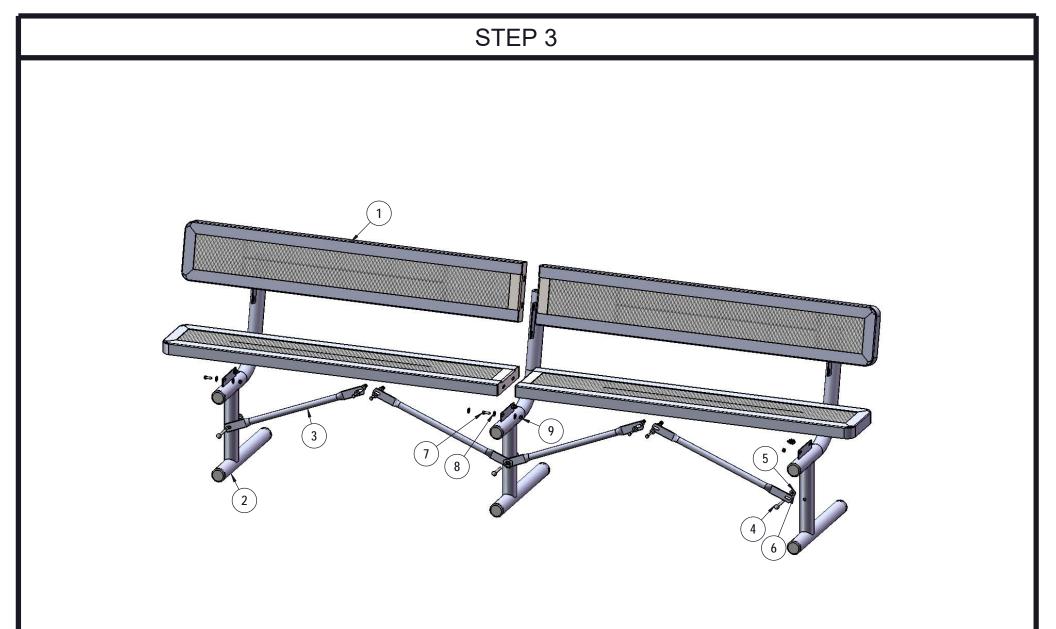

Attach the 29-1/2" Braces to the 940 legs as shown using specified hardware.



# **OVERALL DIMENSIONS**

